


**6 volt, 26 watt low profile emergency lighting units featuring traditional style, high output halogen lighting heads and rugged steel construction.**

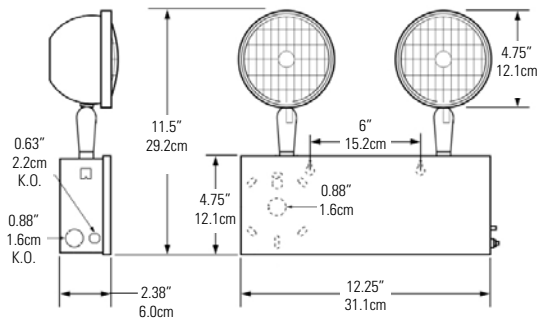

### How to Specify:

<b>MJ1</b>	<b>1</b>	<b>24L</b>	<b>H12</b>	<b>W</b>
<b>SERIES</b>	<b>VOLTAGE</b>	<b>BATTERY WATTAGE</b>	<b>LAMP TYPE</b>	<b>HOUSING COLOR</b>
MJ1 = Chicago Steel Unit	1 = 6V	24L = 24 Watt, Lead Calcium	H12 = Halogen 12W	W = Neutral Cream

## Unit Battery Capacity

Unit	DC Voltage	Lamp Wattage	Watts to 87% of Rated Voltage*			
			1½ hrs.	2 hrs.	4 hrs.	8 hrs.
MJ1124LH12W	6	26	26	20	15	12

\* Per NEC Specifications

## Features

- 1. Illumination:** High output incandescent sealed beam lamps provide glare-free light distribution. 6 volt, 12 watt bi-pin halogen has an expected life of 100 hours.
- 2. Housing:** Heavy duty steel cabinet is finished in neutral cream baked-on powder paint providing scratch and corrosion resistance. All metal lamp housing and swivel assemblies in neutral cream color to match unit housing. Lighting heads are fully adjustable and feature lockable swivels.
- 3. Electronics:** 120/277 VAC dual voltage input with surge-protected, solid-state circuitry. Fully automatic, temperature compensating, variable rate float charging system is complete with low voltage disconnect, AC lockout, brownout protection, AC indicator lamp and test switch.
- 4. Battery:** Maintenance-free, sealed, lead calcium battery has an estimated service life of 5 years, and an operating temperature range of 68°F (20°C) to 86°F (30°C). Pure lead and nickel cadmium batteries are optional. Pure lead operating temperature: 68°F (20°C) to 86°F (30°C), nickel cadmium operating temperature: 32°F (0°C) to 104°F (40°C)
- 5. Input Power Requirements:** 120 VAC//277 VAC
- 6. Warranty:** Unit (excludes lamps) 3 years, Battery: 3 year full, 7 years pro rata

## Code Compliance

All models are UL924 Listed and meet NFPA 101 Life Safety Code, NEC, OSHA and City of Chicago codes

## Options

- V** = Voltmeter (1)  
**A** = Ammeter (1)  
**LC** = 3-Conductor Line Cord - 120VAC  
**B** = Black Finish - Housing and Lighting Heads  
**SX** = Self-Diagnostic Circuit  
**NBP** = Pure Lead Battery)  
**NBN** = Nickel Cadmium Battery  
 (1) Unit has provisions for one meter option only.

## Accessories

- MJPG5** = Wire Guard  
**MJB1** = Mounting Bracket  
**MJS2** = Mounting Shelf  
**MJVERS** = Vandal/Environmental Shield  
**MJVERS4X** = Vandal/Environmental Shield with Gasket

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
We reserve the right to change details of design, materials and finish.  
www.lightolier.com © 2008 Philips Group • A0508